

T Level Technical Qualification in Engineering and Manufacturing

Theory exam 1 - Maths and Science Principles for Engineering (8714-031)

If provided, stick your
candidate barcode label here.

Date of exam: TBC
Duration: 2 hours 30 minutes

Candidate name (first, last)

First

Last

Candidate enrolment number

Date of birth (DDMMYYYY)

Gender (M/F)

Assessment date (DDMMYYYY)

Centre number

Candidate signature/declaration*

- If additional answer sheets are used, enter the additional number of pages in this box. ➔
- Before taking the examination, **all candidates** must check that their barcode label is in the appropriate box. Incorrectly placed barcodes may cause delays in the marking process.
- Please ensure that you staple additional answer sheets to the back of this answer booklet, clearly labelling these with your full name, enrolment number, centre number and qualification number in BLOCK CAPITALS.
- All candidates need to use a **black/blue** pen. **Do not** use a pencil or gel pen, unless otherwise instructed.
- If provided with source documents, these documents **will not** be returned to City & Guilds and will be shredded. Do not write on the source documents.
- *** I declare that I had no prior knowledge of the questions in this examination and that I will not divulge to any person any information about the questions.**

You should have the following for this examination

- a pen with blue or black ink
- a calculator

General instructions

- π should be used as 3.14
- Show all your workings.
- Give your answers to three significant figures, unless otherwise stated.
- The marks for questions are shown in brackets.
- This examination contains **21** questions. Answer all questions.
- Answer the questions in the spaces provided. Answers written in margins or on blank pages will not be marked.
- Cross through any work you do not want to be marked.

This exam has been split into two sections. Below details the types of questions and marks available for each section. Please allow time for each section accordingly.

Section A is made up of **67** marks and includes **18** short answer and medium answer questions.

Section B is made up of **33** marks and includes **3** extended response questions.

Quality of extended responses will be assessed in questions marked with an asterisk (*).

Formula sheet

Note that you may not require every formula on this sheet to answer the questions, and you may require additional formulae not presented here.

Pythagoras theorem	$a^2 + b^2 = c^2$	
Trigonometric relationships	$\tan \theta = \frac{\textit{opposite}}{\textit{adjacent}}$	
	$\sin \theta = \frac{\textit{opposite}}{\textit{hypotenuse}}$	
	$\tan \theta = \frac{\textit{adjacent}}{\textit{hypotenuse}}$	
Trigonometric identities	$\tan \theta = \frac{\sin \theta}{\cos \theta}$	
	$\cot \theta = \frac{1}{\tan \theta}$	
	$\sec \theta = \frac{1}{\cos \theta}$	
	$\operatorname{cosec} \theta = \frac{1}{\sin \theta}$	
Sine rule	$\frac{a}{\sin A} = \frac{b}{\sin B} = \frac{c}{\sin C}$	
Cosine rule	$a^2 = b^2 + c^2 - 2bc \cos A$	
	$b^2 = a^2 + c^2 - 2ac \cos B$	
	$c^2 = a^2 + b^2 - 2ab \cos C$	
Standard derivatives	ax^n	anx^{n-1}
	$\sin ax$	$a \cos ax$
	$\cos ax$	$-a \sin ax$
	$\tan x$	$\sec^2 x$
Standard integrals	ax^n	$\frac{ax^{n+1}}{n+1} + c$ where $n \neq -1$
	$\sin ax$	$-\frac{1}{a} \cos ax + c$
	$\cos ax$	$\frac{1}{a} \sin ax + c$
	$\tan x$	$-\ln \cos x + c$
Simple shapes	Surface area	Volume
Rectangular solid	$2lw + 2hw + 2lh$	lwh
Cylinder	$2\pi r^2 + 2\pi rh$	$\pi r^2 h$
Sphere	$4\pi r^2$	$\frac{4}{3}\pi r^3$
Cone	$\pi rh + \pi r^2$	$\frac{\pi r^2 h}{3}$

Quadratic equation		$x = \frac{-b \pm \sqrt{b^2 - 4ac}}{2a}$
Graphs		$y = mx + c$
Arithmetic progression		$a_n = a + (n - 1)d$
Geometric progression		$a_n = ar^{n-1}$
Statistics	Mean value	$\bar{x} = \frac{\sum(f_x)}{\sum(f)}$
	Standard deviation	$\sigma = \sqrt{\frac{\sum(x - \bar{x})^2}{n}}$
Pressure		$P = FA$
Hydrostatic thrust		$F = \rho g Ax$
Bernoulli's equation		$P + \frac{1}{2}\rho v^2 + \rho gh = \text{constant}$
Sensible heat		$Q = m c \Delta t$
Latent heat		$Q = mh$
Thermal expansion		$\Delta L = \alpha L \Delta t$
Polar to cartesian conversion		$x = r \cos\theta$ $y = r \sin\theta$
Potential energy		$PE = mgh$
Kinetic energy		$KE = \frac{1}{2}mv^2$
Stress		$\sigma = \frac{F}{A}$
Strain		$\varepsilon = \frac{\Delta L}{L}$
Young's modulus		$E = \frac{\sigma}{\varepsilon}$
Gas laws	Boyle's Law	$P_1V_1 = P_2V_2$
	Charles' Law	$\frac{V_1}{T_1} = \frac{V_2}{T_2}$
	General gas equation	$\frac{P_1V_1}{T_1} = \frac{P_2V_2}{T_2}$
	Characteristic gas equation	$pV = mRT$
Resistance in series		$R_T = R_1 + R_2$
Resistance in parallel		$\frac{1}{R_T} = \frac{1}{R_1} + \frac{1}{R_2}$
Capacitance in series		$\frac{1}{C_T} = \frac{1}{C_1} + \frac{1}{C_2}$
Capacitance in parallel		$C_T = C_1 + C_2$
Electrical theory		Ohm's law $V = IR$ $P = IV$

Section A

- 1 Describe what is meant by fan in and fan out in signal processing. (2 marks)

- 2 Name **two** different types of smart material and for each give a typical application. (4 marks)

- 3 Define the following terms used in engineering:

- (a) Reliability (1 mark)

- (b) Accuracy (1 mark)

- (c) Precision (1 mark)

- 4 A robotic delivery vehicle of mass 500 kg is being used to move wagons containing materials around a factory. The wagon and materials have a combined mass of 125 kg. The robotic delivery vehicle, which is initially travelling at 2.4 m s^{-1} , collides with the stationary wagon and the two become fixed together and move as a single mass.

Calculate the common velocity after the collision.

(4 marks)

- 5 Complete the table below, stating a different item of equipment to carry out each measurement.

(3 marks)

Measurement	Equipment used
Checking that the diameter of a hole is $8 \pm 0.1 \text{ mm}$	
Checking that the separation between two metal parts is $1.5 \pm 0.1 \text{ mm}$	
Deviation from concentricity of a shaft	

- 6 The input into a gearbox is 300 revolutions per minute (rpm). The output from the gearbox is 2700 rpm. The gearbox contains two gears.

The output gear has 18 teeth. How many teeth does the input gear have?

(2 marks)

- 7 The shape in Figure 1 must be accurately measured before manufacturing. Calculate the length of side KL.

(3 marks)

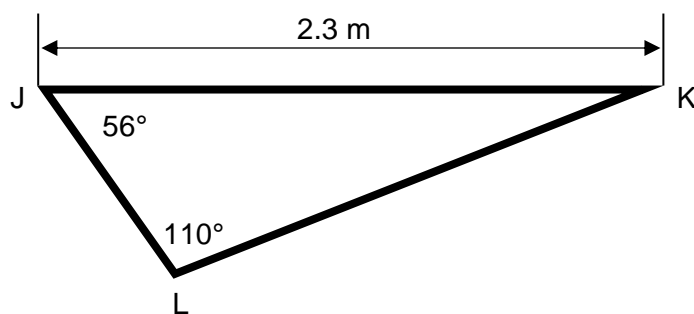


Figure 1 – Not to scale

- 8 A pneumatic cylinder with a movable piston contains 0.9 m^3 of air at a pressure of 6 MPa. Calculate the volume of the air if the pressure exerted within the cylinder is reduced to 1.2 MPa. Assume that the temperature remains constant.

(2 marks)

- 9 The triangle in Figure 2 is a structural part that needs to be manufactured. The designer of the part has specified that $\cot a = 1.73$

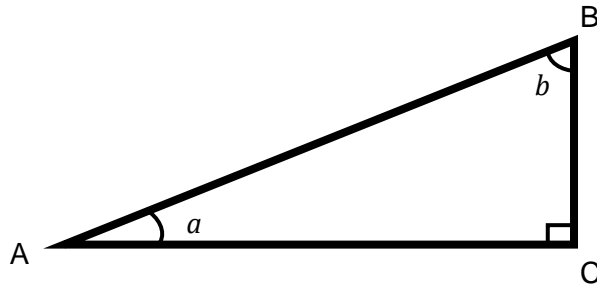


Figure 2 – Not to scale

- (a) Determine the angles a and b . (3 marks)

- (b) Show that the ratio of lengths BC to AB is approximately 0.5 (2 marks)

- 10 A company wants to chemically etch stainless steel labels with its logo and product details, such as the ones shown in Figure 3.

Describe how the etching process would be carried out. (4 marks)



Figure 3

Source: www.brunelengraving.co.uk

- 11 When a sample selected at random from a batch of products was inspected, it was found that:
- 89% of the products contained no defect and were satisfactory,
 - 9% of the total quantity of products contained crack defects,
 - 6% of the total quantity of products contained porosity defects.

Some of the products contained both types of defect.

Calculate the probability that a product selected at random contains only one defect. (3 marks)

- 12 A test was carried out to evaluate the usable life of a machine tool. This involved recording the number of defective parts produced by the machine each hour. The first defective part was produced in hour 5. The number of defects in subsequent hours increased geometrically. The number of defects produced in the hour 8 was 64.

Calculate the common ratio that multiplies the number of defects in each successive batch. (3 marks)

- 13 In a circuit, three components each change the amplitude of the output, D , in sequence by different values:

- Component 1 causes the amplitude to increase by the cube of its value (D^3).
- Component 2 causes the amplitude to be divided by the square of its value (D^2).
- Component 3 multiplies the resultant output by its square root ($D^{\frac{1}{2}}$).

Determine the simplest form of the equation to represent how the output signal is affected by the three components. (3 marks)

- 17 A company manufactures hard hats from a metal alloy, such as the one shown in Figure 5. The design specifies that the metal should have a crystalline structure. Due to a manufacturing issue, the metal has been produced with an amorphous non-crystalline structure.

Explain how this will affect the performance of the hard hat when it is subjected to an impact.

(4 marks)



Figure 5

Source: www.forestry-suppliers.com

- 18 A company is planning to build a new factory to mass produce electronic circuit boards for phones. Each of the assembly operations will be carried out by dedicated robotic arms. The factory will work seven days a week, 24 hours a day in order to meet demand. New phone designs will be manufactured each year.

Explain why programmable logic controllers (PLCs) would be used to control the robotic arms, rather than dedicated integrated circuits.

(6 marks)

The T Level is a qualification approved and managed by the Institute for Apprenticeships and Technical Education.

Copyright in this document belongs to, and is used under licence from, the Institute for Apprenticeships and Technical Education, © 2021. 'T-LEVELS' is a registered trademark of the Department for Education. 'T Level' is a registered trademark of the Institute for Apprenticeships and Technical Education. 'Institute for Apprenticeships & Technical Education' and logo are registered trademarks of the Institute for Apprenticeships and Technical Education.

We make every effort to ensure that the information contained in this publication is true and correct at the time of going to press. However, City & Guilds' products and services are subject to continuous development and improvement, and the right is reserved to change products and services from time to time. City & Guilds cannot accept responsibility for any loss or damage arising from the use of information in this publication.

The City & Guilds of London Institute. All rights reserved. City & Guilds is a trademark of the City & Guilds of London Institute, a charity established to promote education and training registered in England & Wales (312832) and Scotland (SC039576). City and Guilds Group Giltspur House, 5–6 Giltspur Street London EC1A 9DE